
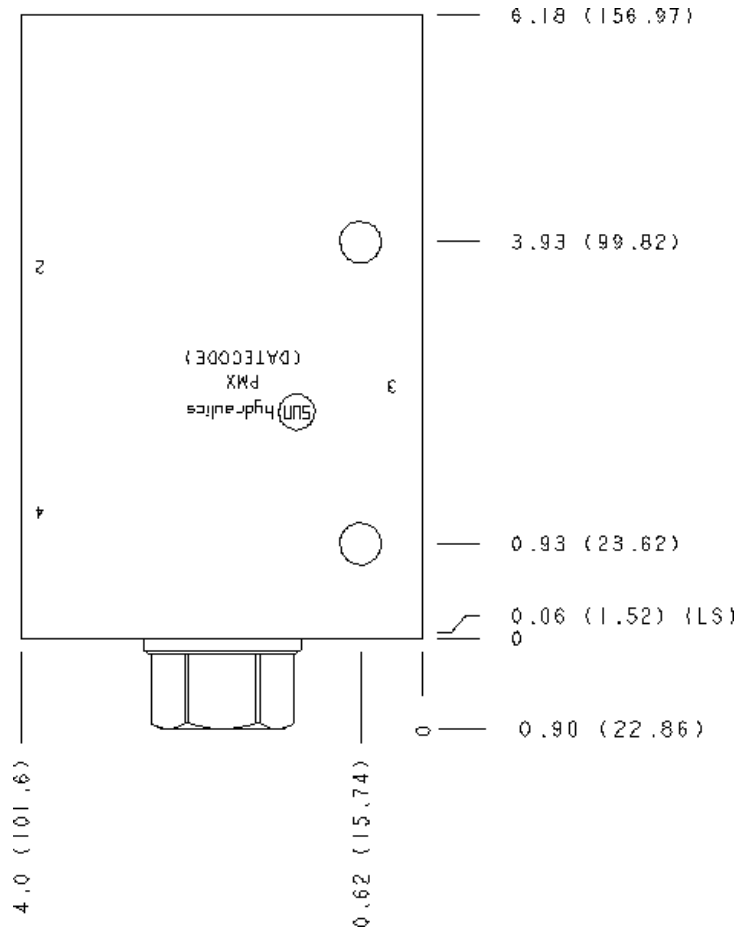


**MODEL**  
FSEAXAN-PMX

**Closed center, flow divider-combiner valve**  
**CAPACITY: 23 - 120 L/min. | CAVITY: T-33A**

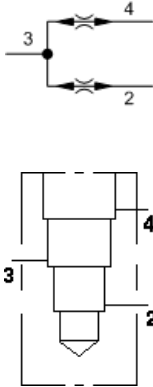

#### CARTRIDGE CONFIGURATION

<b>X</b>	Control	Not Adjustable
<b>A</b>	Flow Split	50/50
<b>N</b>	Seal Material	Buna-N

#### MANIFOLD CONFIGURATION

<b>(none)</b>	Modifier	6061-T651 Aluminum, Buna-N
---------------	----------	-------------------------------

#### PORT HEADINGS AND SIZES

Modifiers	Ports
PMX	All Ports: 1" BSPP;

#### NOTES

**Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

Closed-center flow divider/combiners are sliding-spool, pressure-compensated devices used to split flow in one direction and combine flow in the opposite direction. These valves may be used to accurately control two or more cylinders or hydraulic motors where bidirectional operation is required.

#### CARTRIDGE TECHNICAL DATA

Cavity	T-33A
Series	3
Capacity	23 - 120 L/min.
Maximum Operating Pressure	350 bar
Divisional Accuracy at Minimum Input Flow	50% ±4.5%
Divisional Accuracy at Max Input Flow	50% ±2.5%
Pressure Drop at Minimum Rated Input Flow	2 bar
Pressure Drop at Maximum Rated Input Flow	24 bar
Valve Hex Size	31,8 mm
Valve Installation Torque	203 - 217 Nm
Seal kit - Cartridge	Buna: 990-033-007
Seal kit - Cartridge	Polyurethane: 990-033-002
Seal kit - Cartridge	Viton: 990-033-006

Model Weight	0.00 kg.
--------------	----------

---

**MANIFOLD TECHNICAL DATA**

Body Type	Line mount
Interface	None
Body Features	Ninety degree
Mounting Hole Diameter	10,7 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	2
Open Cavities	1
Cavity	T-33A
Port Size	1" BSPP
Model Weight	1.96 kg.

Copyright © 2002-2017 Sun Hydraulics Corporation. All rights reserved.