


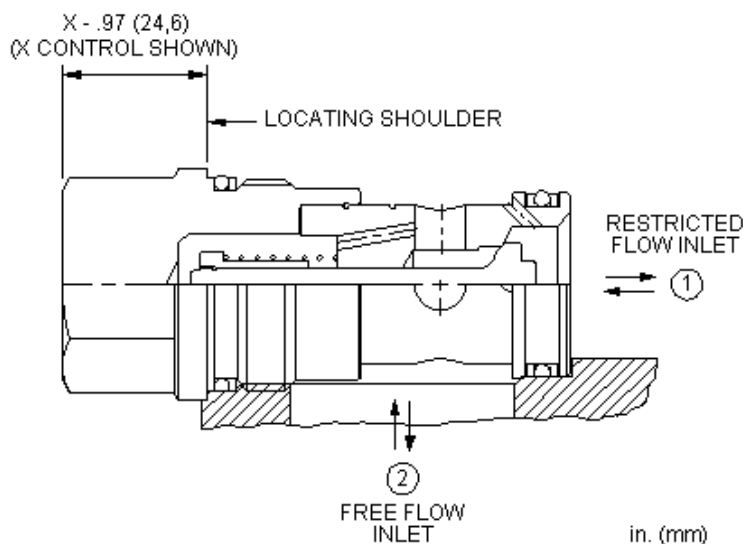

This valve is a fixed-orifice, non-pressure-compensated flow control with a reverse flow check. The flow setting is specified by the user and is set at the factory.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Orifice Range	0,4 - 5,5 mm
Seal kit - Cartridge	Buna: 990016007
Seal kit - Cartridge	Polyurethane: 990016002
Seal kit - Cartridge	Viton: 990016006

CONFIGURATION OPTIONS

Model Code Example: CNGCXCN

CONTROL	(X) SETTING RANGE	(C) SEAL MATERIAL	(N) MATERIAL/COATING
X Not Adjustable	C 30 psi (2 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm) A 4 psi (0,3 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm) B 15 psi (1 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm) D 50 psi (3,5 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm) E 75 psi (5 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm) F 100 psi (7 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)	N Buna-N V Viton	Standard Material/Coating /AP Stainless Steel, Passivated